



PREMIUM VORTEX SUMP PUMP

RVS SERIES

This REEFE submersible vortex pump has been specifically designed for sump pump out applications. Solid cast-iron and stainless steel construction for robust and reliable pumps on which you can depend. Capable of handling soft solids up to 15mm.

APPLICATIONS

- Dirty water transfer
- Greywater
- Household wastewater
- Sump draining
- Pool emptying
- Wastewater systems

FEATURES & BENEFITS

- Solids handling 15mm
- High performance
- Thermal overload protection
- 10m power cable, H05RN-F
- Includes 3 different hoesetails - 25/32/40mm
- Includes lifting rope
- Max liquid temperature 40°C
- Max ambient temperature 40°C
- Electrical Safety Approval to AS/NZS 60335.2.41


CONSTRUCTION

- Stainless steel motor housing and shaft
- Technopolymer vortex impeller with special sand-flinging design to reduce clogging and wear
- Dual silicon carbide/ceramic mechanical seal with oil chamber
- MAC 3 type float switch, depth adjustable
- Ingress Protection IP68
- Insulation Class B
- Cast iron base and outlet



RVS155M

RVS155

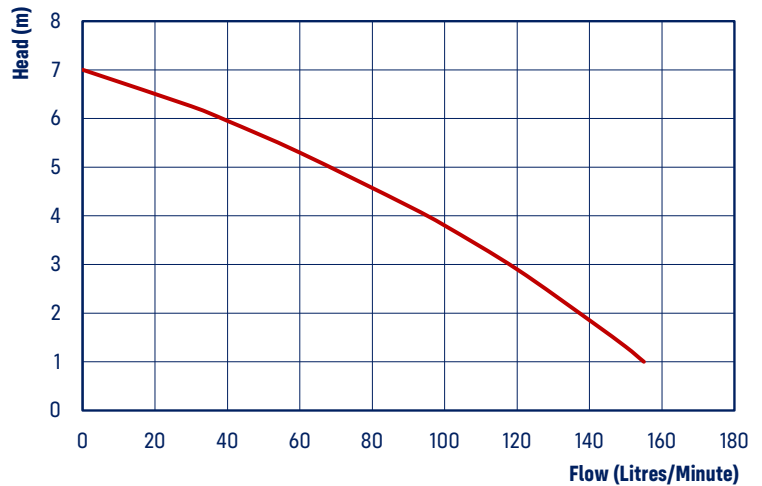

CODE	MODEL	POWER 240V			RATED		MAXIMUM		SOFT SOLIDS HANDLING (MM)	CABLE LENGTH (M)	OUTLET		WEIGHT (KG)	SIZE L X W X H (MM)
		AMPS	P1 (kW)	P2 (kW)	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)			MM	IN		
8409	RVS155	1.5	0.35	0.18	90	4.0	155	7.0	15	10	32	1 1/4"	8.5	220x120x340
16770	RVS155M	1.5	0.35	0.18	90	4.0	155	7.0	15	10	32	1 1/4"	8.5	220x120x340